

Pin Header

Dual Row

Pitch: 1.27x2.54mm

Series
460 13

Odia 奥比亚

Tel: (+86)0755-28248661/2/3




Fax: (+86)0755-27857873

SPECIFICATIONS (技术参数):







Current Rating (额定电流): 1.0 A
 Withstand Voltage (耐压值): 500V AC/Min
 Insulation Resistance (绝缘电阻): 1000M Ω Min
 Contact Resistance (接触电阻): 30m Ω Max
 Operation Temperature (工作温度): -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS (材质):




Contact Material (接触件材质): Phosphor Bronze of Brass
 Contact Plating (接触件电镀): Gold or Tin over 50u"Ni
 Insulator (绝缘体材质): PBT OR PA6T(UL94V-0)



P.C. B LAYOUT

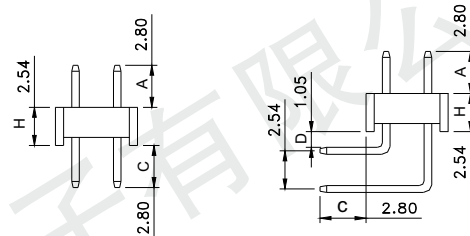

P.C. B LAYOUT

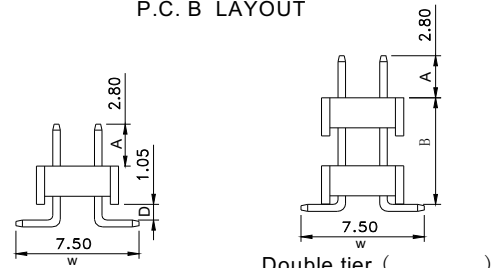

Double tier ()

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 460 13 3 2 50 S 1 4 1 XXX

- ④ Number of row
2=Double row
- ⑤ Number of Contacts:
Double row=04(2x2)to 100(2x50)
- ⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle DIP Type
M=Straight SMT type
- ⑦ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6=Gold 30u" A=Gold 1.5u"
B=Gold 2u"
- ⑧ Material Type
2=LCP
3=Nylon-9T
4=Nylon-6T
5=PA46
- ⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier
- ⑩ Pin Length
XXX=A+H+C
XXX=A+H+C+D+1.20
XXX=A+H+D+(W-2.54)/2

- ① Series No.:
460= Pin Header
- ② Pitch:
13=1.27X2.54 mm
- ③ Insulator Height:
3=2.54mm