

Pin Header

Single Row / Dual Row; S.M.T Type

Pitch: 2.00mm


Series

460 20

Odia 奥比亚

Tel: (+86)0755-28248661/2/3

Fax: (+86)0755-27857873




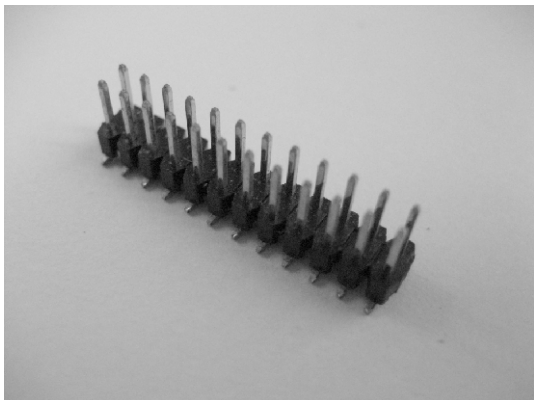


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 2.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 500VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Copper Alloy
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester (UL94V-0)
 Standard: PBT

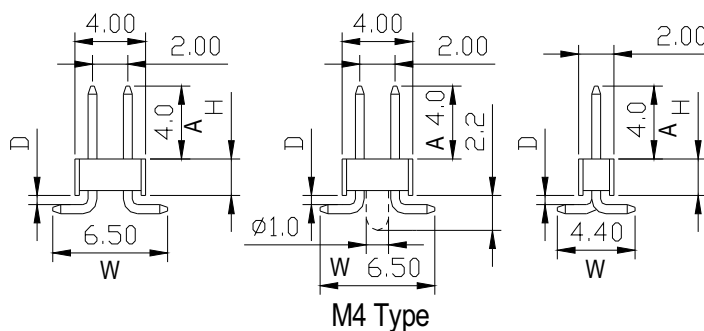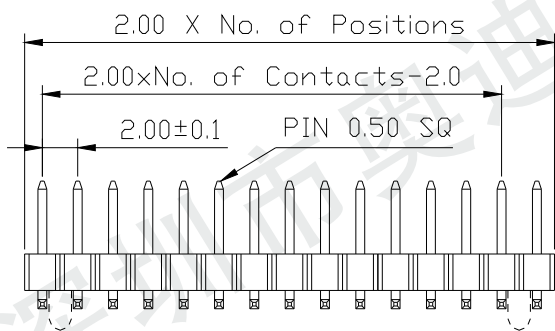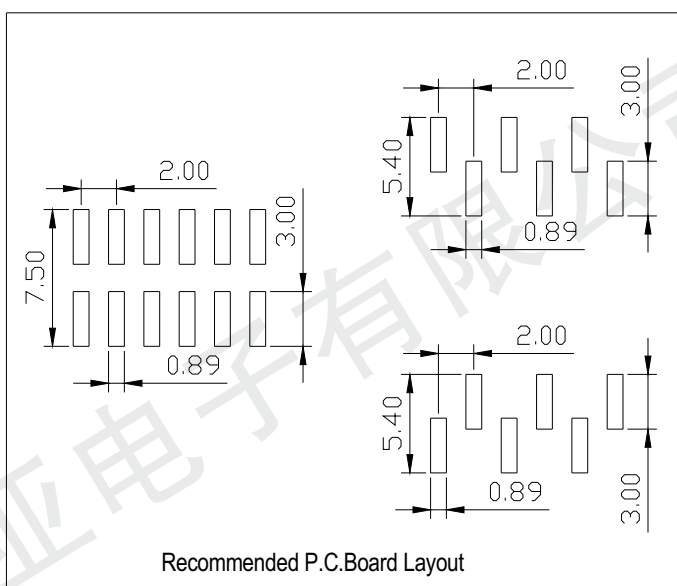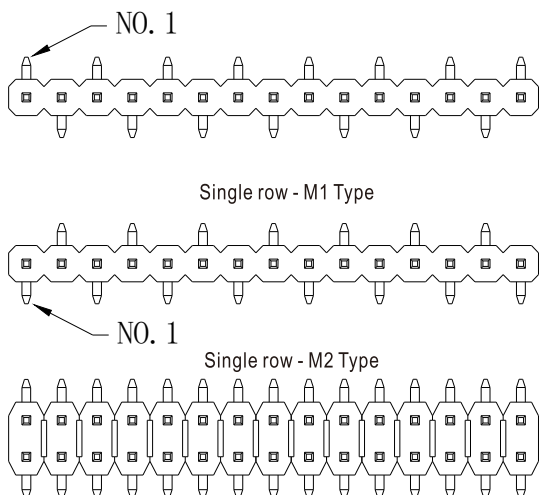

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 46020 2 2 20 M 2 5 1 XXX

① Series No.: 460= Pin Header
 ② Pitch: 20= 2.00mm

③ Insulator Height:
 2 = 2.00mm
 1 = 1.50mm

④ Number of row:
 1=Sing row
 2=Double row
 ⑤ Number of Contacts:
 Single row=01(1x1) to 40(1x40)
 Double row=04(2x2) to 80(2x40)

⑥ Tail & Mounting Style:
 M= Straight SMT type

⑦ Contact Plated
 0= Tin 1= Gold Flash
 2= Gold 3u" 3= Gold 5u"
 4= Gold 10u" 5= Gold 15u"
 6= Gold 30u" A= Gold 1.5u"
 B= Gold 2u"

⑧ Material Type
 0= PPS 3= Nylon-9T
 1= PBT 4= Nylon-6T
 2= LCP 5= PA46

⑨ Tiers of Body
 1 = Single tier
 2 = Double tier
 3 = Triple tier

⑩ Pin Length
 XXX=A+H+D+(W/2)
 XXX=A+H+D+(W-2.0)/2