

Pin Header

Dual Row/ Right Angle SMT Type

Pitch:2.00mm


Series

466 20

Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873

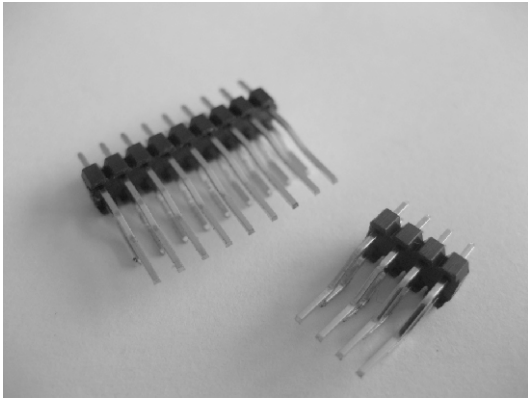


SPECIFICATIONS (技术参数):

Current Rating (额定电流):	2.0 AMP
Contact Resistance (接触电阻):	30mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	500VAC/minute
Operation Temperature (工作温度):	-40°C to +105°C

MATERIALS(材质):

Contact Material (接触件材质):	Copper Alloy
Contact Plating (接触件电镀):	Gold or Tin over 50 μ "Ni
Insulator Material (绝缘体材质):	Polyester(UL94V-0)
	Standard: PBT

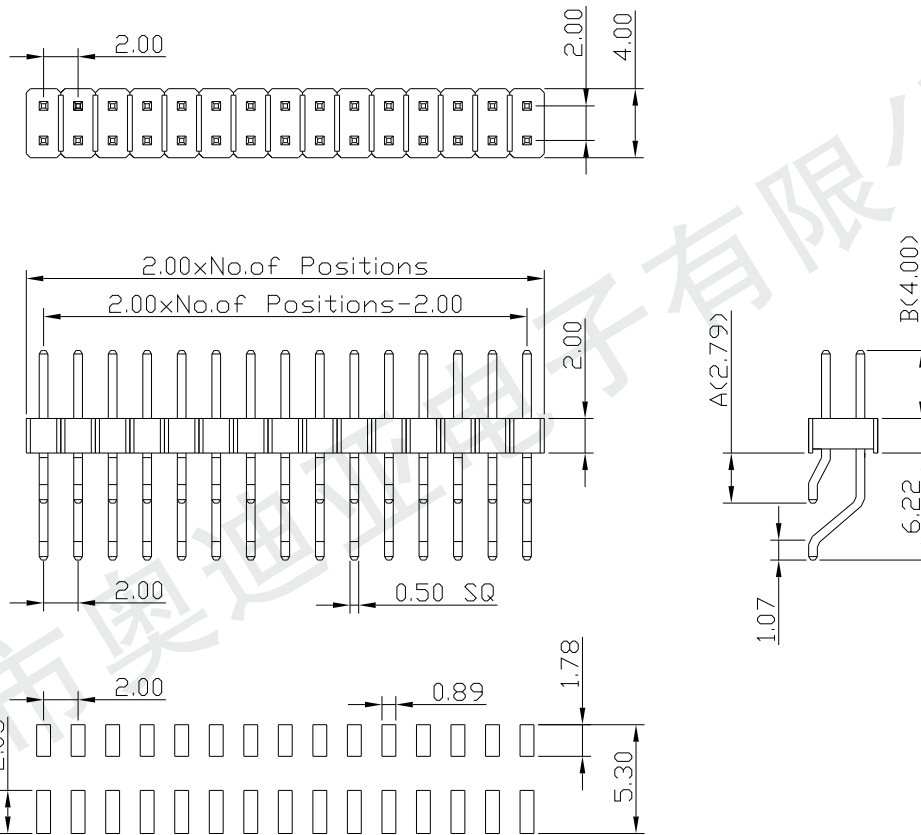

PCB LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
466 20 2 2 16 M 1 5 1

① Series No.:
466= Pin Header

③ Insulator Height:
2 = 2.00mm
1 = 1.50mm

④ Number of row:
1=Sing row
2=Double row

⑤ Number of Contacts:
Single row=01(1x1)to 40(1x40)
Double row=04(2x2)to 80(2x40)

⑥ Tail & Mounting Style:
M=Straight SMT type

⑦ Contact Plated
0=Tin 1=Gold Flash
2=Gold 3u" 3=Gold 5u"
4=Gold 10u" 5=Gold 15u"
6= Gold 30u" A=Gold 1.5u"
B=Gold 2u"

⑧ Material Type
0=PPS 3=Nylon-9T
1=PBT 4=Nylon-6T
2=LCP 5=PA46

⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier