

# Pin Header

Triple Row/Straight DIP Type

Pitch:2.00mm


# Series

460 20

# Odia 奥比亚

Tel:(+86)0755-28248661/2/3

Fax:(+86)0755-27857873

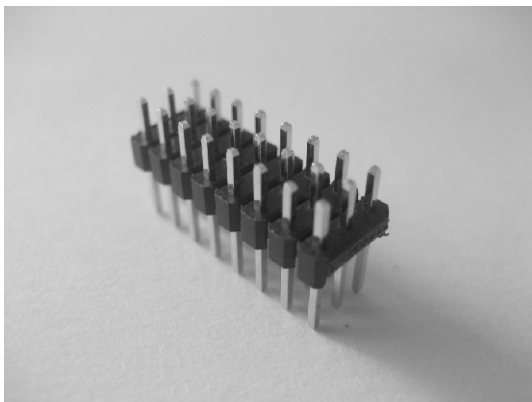


### SPECIFICATIONS (技术参数):

|                               |                 |
|-------------------------------|-----------------|
| Current Rating (额定电流):        | 2.0 AMP         |
| Contact Resistance (接触电阻):    | 30mΩ Max        |
| Insulation Resistance (绝缘电阻): | 1000MΩ Min      |
| Withstand Voltage (耐压值):      | 500VAC/minute   |
| Operation Temperature (工作温度): | -40°C to +105°C |

### MATERIALS(材质):

|                             |                           |
|-----------------------------|---------------------------|
| Contact Material (接触件材质):   | Copper Alloy              |
| Contact Plating (接触件电镀):    | Gold or Tin over 50 μ "Ni |
| Insulator Material (绝缘体材质): | Polyester(UL94V-0)        |
|                             | Standard: PBT             |

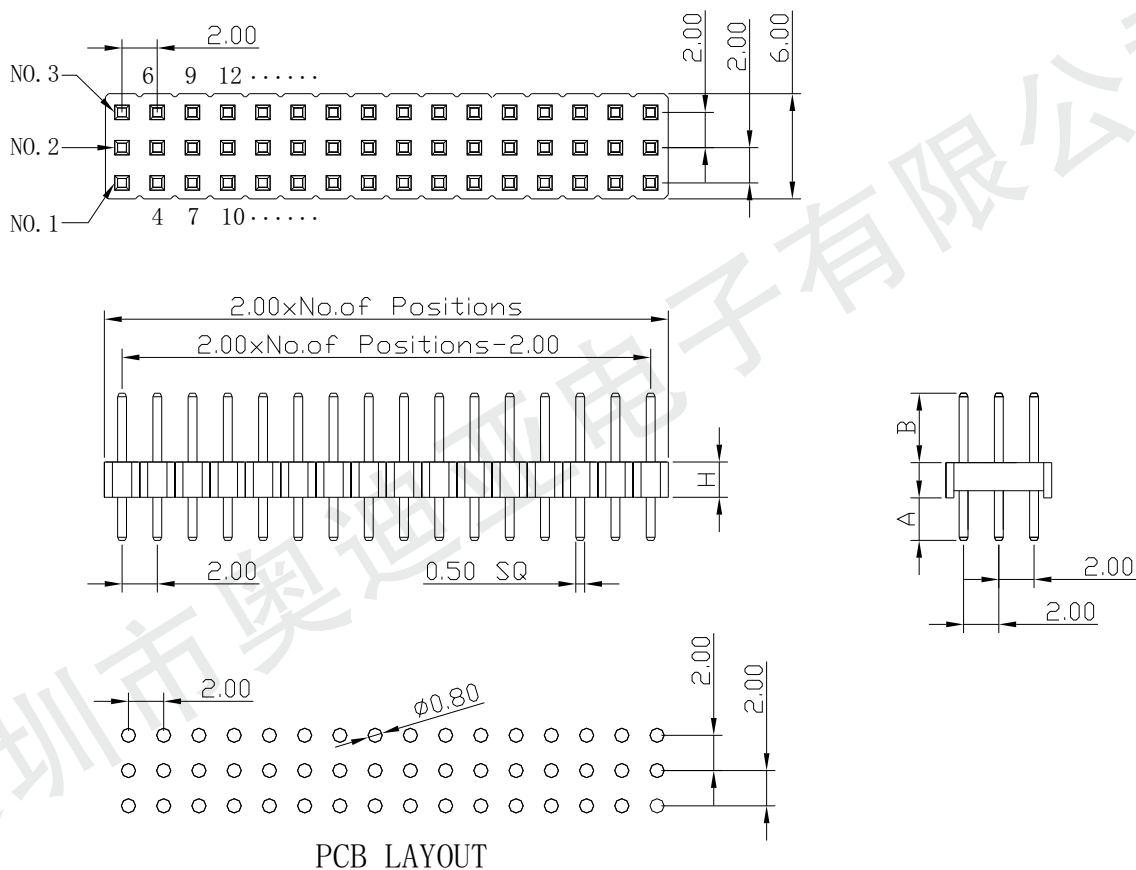

## Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

460 20 2 3 075 S 1 5 1

① Series No.: 460 = Pin Header  
 ② Pitch: 20 = 2.00mm  
 ③ Insulator Height: 2 = 2.00mm

④ Number of row: 3=Triple row  
 ⑤ Number of Contacts: Triple row = 03 to 120  
 ⑥ Tail & Mounting Style: S=Straight DIP type, R=Right Angle DIP Type, M=Straight SMT type

⑦ Contact Plated  
 0=Tin, 1=Gold Flash, 2=Gold 3u", 3=Gold 5u", 4=Gold 10u", 5=Gold 15u", 6=Gold 30u", A=Gold 1.5u", B=Gold 2u"  
 ⑧ Material Type  
 0=PPS, 1=PBT, 2=LCP, 3=Nylon-9T, 4=Nylon-6T, 5=PA46

⑨ Tiers of Body  
 1 = Single tier, 2 = Double tier, 3 = Triple tier